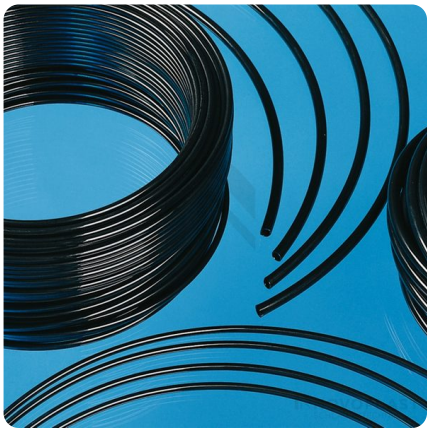


Master-Tube PA EL

PA tubing containing plasticisers, electrically conductive, for industrial and pneumatic applications, temperature- and UV-resistant, abrasion-resistant, impact-resistant

electrically conductive | spiral-free | metal-free | pressure resistant

Product Details

Construction / Material

- Type of construction: axially extruded tubing without seams or welds
- Specifications of the wall: surface resistance $R_o < 10^5$ Ohm

Properties

- Chemical Properties: good resistance to petrol, good resistance to solvents, good resistance to oil, good UV resistance, good resistance to fats
- Physical Properties: moisture resistant
- Pressure Resistance: pressure resistant

Operating Temperature

- Temperature Range: -40 to 90 °C

Application Areas

- Areas of application: Plant & Mechanical Engineering, Industry

Customizing Options

- optional item modification (on request): printable, rolls

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+44 161 626 8066**

Product requests via: **https://www.masterflex-hose.co.uk/**

Headquarters for your sales area

Masterflex Technical Hoses, Ltd.

Units G & H
Prince of Wales Business Park
Vulcan Street
Oldham OL1 4ER
Great Britain