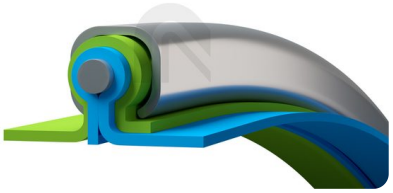

Master-Clip HT 500

Article Master No.: 000306

Medium- and high temperature hose for temperatures up to 500 °C

microbe resistant | compressible | hydrolysis resistant | temperature-resistant | very flexible | heavy | moderately pressure resistant

Product Details

Key facts

- Product Advantages: tension-resistant clamping of the wall within the clamping profile

Construction / Material

- Type of construction: spiral hose with clamping profile
- Design of the helix: metal band, formed as a clamping profile
- Material of the helix: steel strip, hot-dip galvanised
- Design of the external spiral: designed as an additional protective profile
- Material of the wall: stainless steel-laminated glass fabric, PU-coated on one side

Properties

- Flexibility: very flexible
- Physical Properties: flame resistant, non-flammable
- Weight: heavy
- Pressure Resistance: moderately pressure resistant
- Colour: inside silver, outside red
- Other: good vacuum resistance, high gas tightness in the vacuum and low pressure range

Operating Temperature

- Temperature Range: -20 to 500 °C
- short-term maximum temperature: +550 °C
- proper use: for flue gas temperatures >+250 °C, suitable only for static negative pressure applications with a minimum of 50% fresh air supply at the maximum specified temperature

Delivery Information

- Delivery, type of production: order-related production

Application Areas

- Areas of application: Automotive, Ventilation & Air-conditioning

Customizing Options

- optional item modification (on request): other lengths, other nominal widths, with stainless steel spiral

Article Variants

Extended Article Number	Nominal Size (DN) in mm	Bending radius* in mm	Weight in kg/m	Operating pressure in bar	Negative pressure in bar	Max. Production length in m	Length (standard lengths available for order) in m
000306:75:x	75	45	1.44	0.62	0.25	10.00	3 / 6 / 10
000306:80:x	80	48	1.53	0.61	0.22	10.00	3 / 6 / 10
000306:90:x	90	54	1.72	0.56	0.21	10.00	3 / 6 / 10
000306:100:x	100	60	1.98	0.51	0.17	10.00	3 / 6 / 10
000306:110:x	110	66	2.17	0.48	0.14	10.00	3 / 6 / 10
000306:120:x	120	72	2.20	0.36	0.12	10.00	3 / 6 / 10
000306:125:x	125	75	2.45	0.33	0.10	10.00	3 / 6 / 10
000306:130:x	130	78	2.54	0.28	0.10	10.00	3 / 6 / 10
000306:140:x	140	84	2.73	0.25	0.09	10.00	3 / 6 / 10
000306:150:x	150	90	2.92	0.22	0.08	10.00	3 / 6 / 10
000306:160:x	160	96	3.11	0.21	0.07	10.00	3 / 6 / 10
000306:170:x	170	102	3.33	0.19	0.06	10.00	3 / 6 / 10
000306:175:x	175	105	3.43	0.19	0.06	10.00	3 / 6 / 10
000306:180:x	180	108	3.52	0.17	0.05	10.00	3 / 6 / 10
000306:200:x	200	120	3.90	0.15	0.04	10.00	3 / 6 / 10
000306:215:x	215	151	3.12	0.13	0.04	10.00	3 / 6 / 10
000306:225:x	225	158	3.26	0.12	0.03	10.00	3 / 6 / 10
000306:250:x	250	175	3.62	0.10	0.03	10.00	3 / 6 / 10
000306:275:x	275	193	3.97	0.08	0.02	10.00	3 / 6 / 10
000306:300:x	300	210	4.32	0.07	0.02	10.00	3 / 6 / 10
000306:315:x	315	221	4.53	0.06	0.02	10.00	3 / 6 / 10
000306:325:x	325	228	4.67	0.06	0.02	10.00	3 / 6 / 10
000306:350:x	350	245	5.03	0.06	0.02	10.00	3 / 6 / 10
000306:375:x	375	263	5.41	0.05	0.01	10.00	3 / 6 / 10
000306:400:x	400	280	5.76	0.05	0.01	10.00	3 / 6 / 10
000306:450:x	450	360	6.46	0.05	0.01	6.00	3 / 6 / 10
000306:500:x	500	400	7.17	0.04	0.01	6.00	3 / 6 / 10
000306:550:x	550	440	7.87	0.04	0.01	6.00	3 / 6 / 10
000306:600:x	600	480	8.58	0.04	0.01	6.00	3 / 6 / 10

Extended Article Number	Nominal Size (DN) in mm	Bending radius* in mm	Weight in kg/m	Operating pressure in bar	Negative pressure in bar	Max. Production length in m	Length (standard lengths available for order) in m
000306:700:x	700	560	9.98	0.03	0.01	6.00	3 / 6 / 10
000306:800:x	800	640	11.39	0.02	0.01	6.00	3 / 6 / 10
000306:900:x	900	720	12.80	0.02	0.01	6.00	3 / 6 / 10

All data refer to a medium and ambient temperature of +20°C.
Specification of the bending radius related to the inside of the hose bend
Subject to technical changes and colour deviations

Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).

Suitable for the product

Hose connector
Sheet steel connector for extending, connecting and joining light to medium-weight hoses

Hose Reducer, symmetrical
Hose reducer for extending, connecting and joining light to medium weight hoses

Individual consultation

We offer consultation by phone: **+44 161 626 8066**
Product requests via: **https://www.masterflex-hose.co.uk/**

Headquarters for your sales area

Masterflex Technical Hoses, Ltd.

Units G & H
Prince of Wales Business Park
Vulcan Street
Oldham OL1 4ER
Great Britain